

# CLEARLINE INC.

WINDOW CONTROL SYSTEMS

## 24 VDC MOTORIZED ACTUATOR SYSTEMS

P/N 2092

### MONDO ACTUATOR

The Mondo Actuator offers a maximum opening of 19" using a double link chain. The end stroke current absorption avoids adjustments during closing action and avoids possible positioning errors of the actuator. An electronic device for traction force control allow speed reduction during the last 4" of stroke.

Dimensions: 15-1/4"W x 2"H x 4-3/4"H

Max load Max load in thrust: 400N / 89lb

Max load in traction: 400N / 89lb

Adjustable Stroke: 4", 6", 8", 10", 12", 14" or 19"

Protection degree : IP55

Stroke End: Current Absorption

CE marked device: EEC 89/336, EEC 73/23

Available in Black, White and Grey




### ELECTRICAL NOTES

Our low voltage motorized system includes:

The actuator, 3-position switch, control panel and window attachments. It does not include installation, field wiring, switch boxes, electrical conduit or junction boxes necessary to comply with electrical codes.

Screen closures are optional.

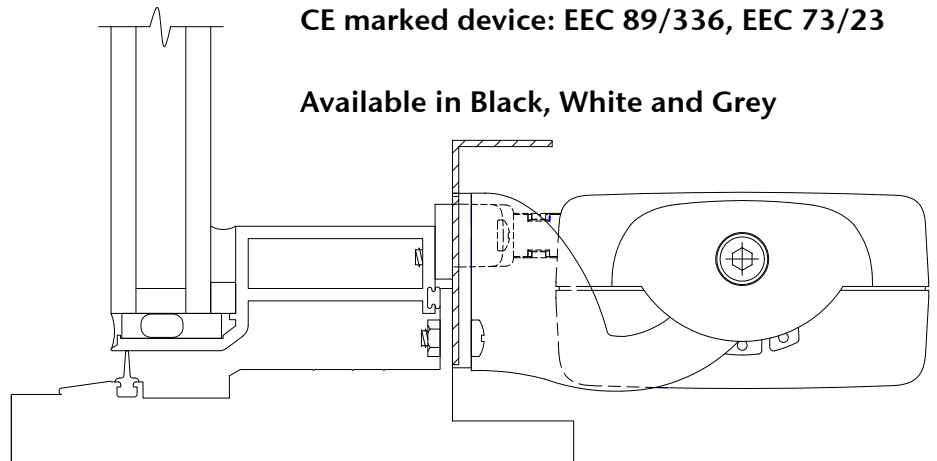

## THE CLEAR CHOICE

FOR ENERGY CONSERVING WINDOW CONTROL MANAGEMENT  
GREEN SINCE 1969

WWW . CLEARLINEINC . COM

215-699-9292

FAX 215-699-7112

P . O . BOX 1368 810-D DICKERSON ROAD

NORTH WALES, PA 19454-0368