

HAND CRANKED MANUAL CONTROL SYSTEMS

SURFACE MOUNTED OR CONCEALED (WITHIN WALL) SYSTEMS

Controls may be installed on the wall surface or completely concealed within the walls, providing superior function. Baked enamel finish on surface crank, or a brushed stainless steel faceplate for concealed crank, has excellent appearance.

COMPLETELY INTEGRATED SEALED SYSTEM


All moving parts sealed without necessity of further maintenance or lubrication. High tensile strength flexible steel cable operates through entire length of plastic lined steel conduit. At both the crank and head gear, the cable engages gearing which projects the chain attachment at the vent.

GENERAL NOTES

Parts have standard white, silver or bronze finish.

DESIGN FLEXIBILITY

Locate crank in convenient position for any design requirement. Removable handle prevents overcranking of window operation by unauthorized personnel. Quick disconnect at vent provides easy access to windows for cleaning purposes. Permits use of curtains, blinds or screens.

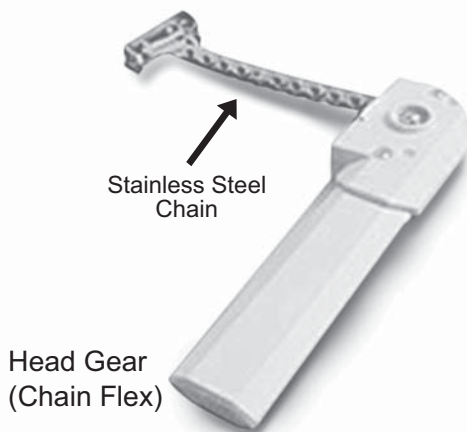

Head Gear
(Chain Flex)



Manual Operator
(Hand Crank)

THE CLEAR CHOICE


FOR ENERGY CONSERVING WINDOW MANAGEMENT
GREEN SINCE 1969

CLEARLINE^{INC.}

WINDOW CONTROL SYSTEMS

HAND CRANKED MANUAL CONTROL SYSTEMS

CONTROL SYSTEMS

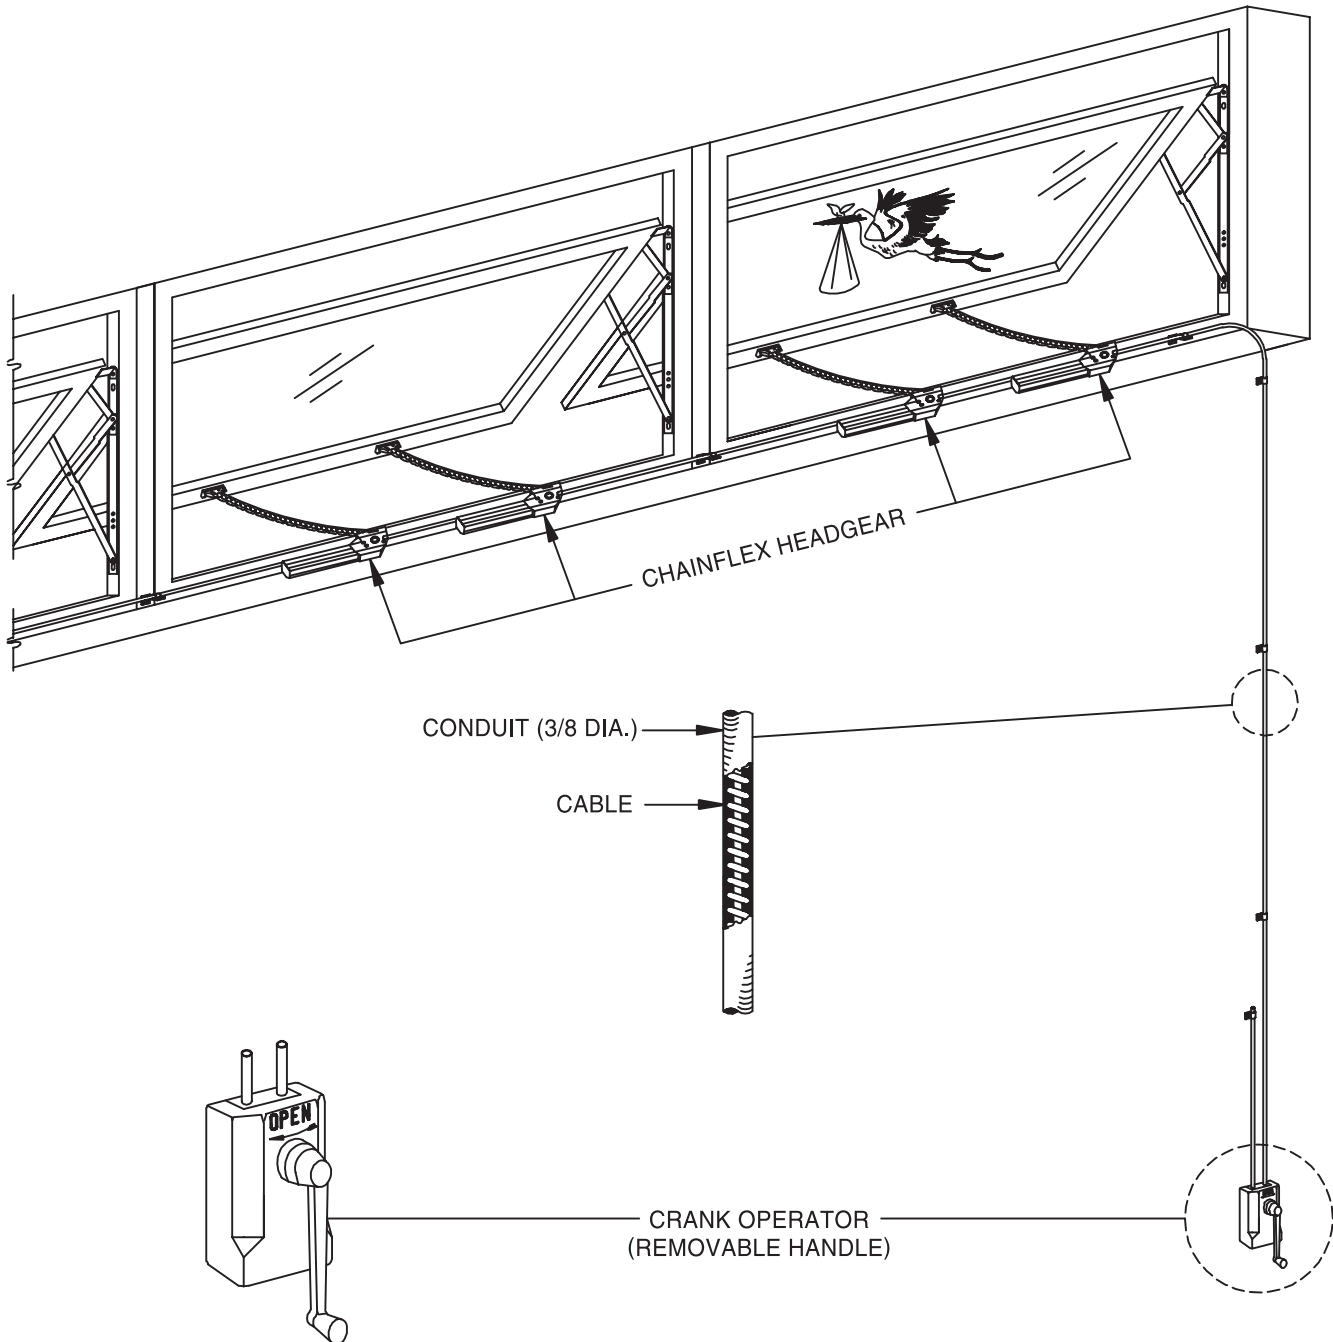

THE CLEAR CHOICE

FOR ENERGY CONSERVING WINDOW MANAGEMENT
GREEN SINCE 1969

WWW.CLEARLINEINC.COM • 215-699-9292 • FAX 215-699-7112
P.O. BOX 1368 • 810-D DICKERSON ROAD • NORTH WALES, PA 19454-0368