


**ELECTRICAL NOTES:**

1. OUR MOTORIZED SYSTEM INCLUDES: THE ACTUATOR, 3-POSITION SWITCH AND CLEARLINE ATTACHMENT AT THE WINDOW. IT DOES NOT INCLUDE: ANY INSTALLATION, FIELD WIRING, SWITCH BOXES, ELECTRICAL CONDUITS, OR JUNCTION BOXES NECESSARY TO COMPLY WITH ELECTRICAL CODES FOR 120V AND LOW VOLTAGE WIRING REQUIREMENTS. NOTE: PROVISIONS FOR PROPER FIELD WIRING MUST BE COORDINATED WITH ELECTRICAL CONTRACTOR.
2. THIS MOTORIZED SYSTEM AS SUPPLIED CANNOT BE CONTROLLED BY THERMOSTAT OR AUTOMATIC MODE.
3. ROCKER SWITCH (ITEM 2) AND POWER SUPPLY (ITEM 3) CAN BE PLACED AT ANY LOCATION WITHIN 100 FT.
4. REFER TO WIRING DIAGRAM ED 441: (4) ACTUATORS CONTROLLED BY (1) ROCKER SWITCH (ITEM 2) USING POWER SUPPLY (ITEM 3) AND ACTUATOR GROUP CONTROLLER (ITEM 9).
5. REFER TO WIRING DIAGRAM ED 440: (5) ACTUATORS CONTROLLED BY (1) ROCKER SWITCH (ITEM 2) USING POWER SUPPLY (ITEM 3) AND ACTUATOR GROUP CONTROLLER (ITEM 6).

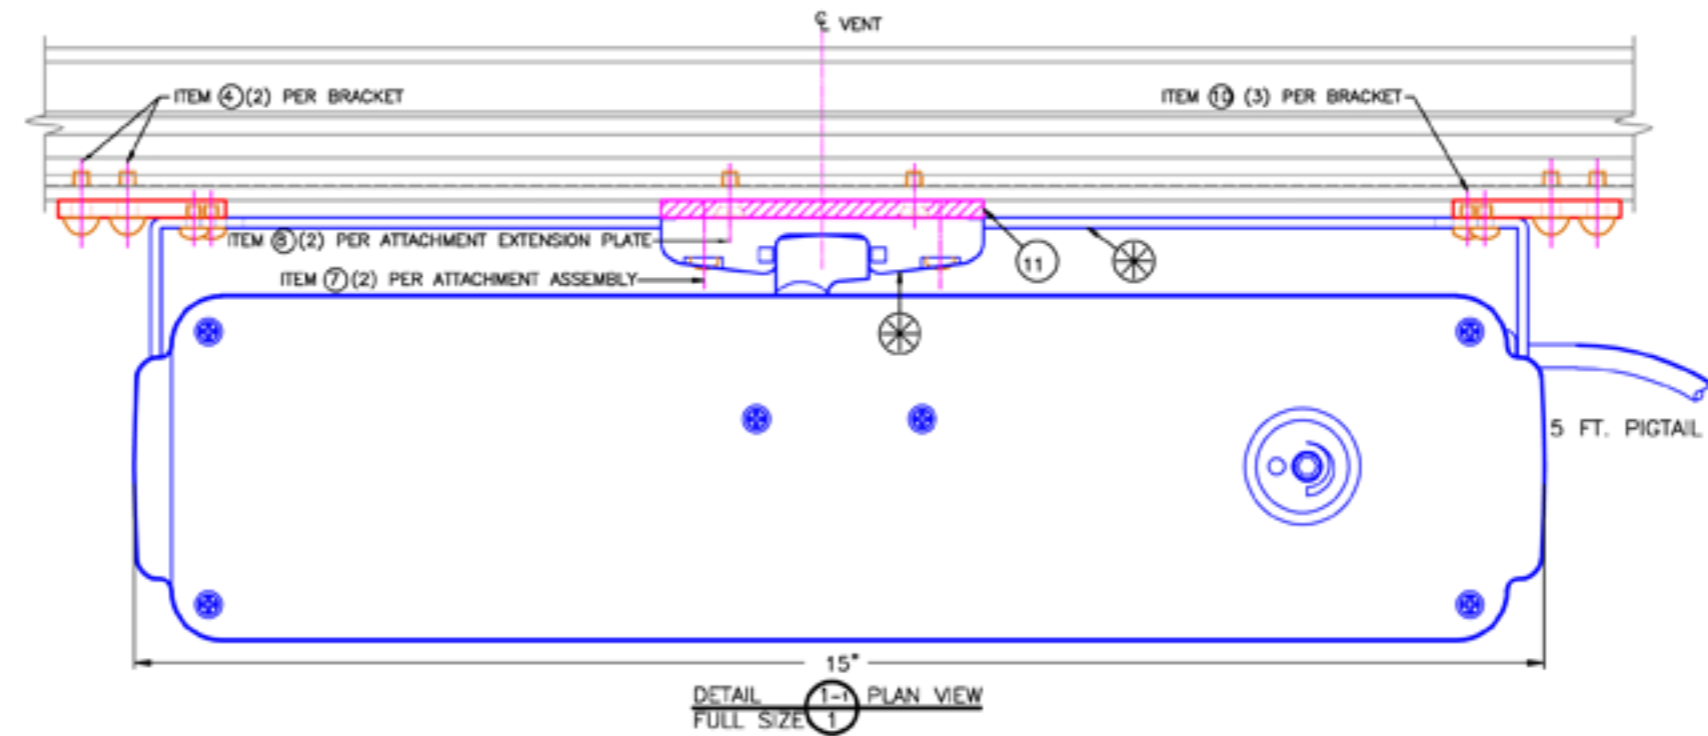

ACTUATOR STANDARD FINISH IS WHITE, GREY OR BLACK.  
**PLEASE SPECIFY**

- GENERAL NOTES:**
1. Ⓢ DENOTES ITEMS SUPPLIED WITH ACTUATOR
  2. THESE CONTROLS WILL OPEN VENT 18".
  3. ALL ELEVATIONS ARE VIEWED FROM THE INSIDE.
  4. VENTS MUST MOVE FREELY - FINGER-TIP OPERATION. FOR EASE OF OPERATION, HINGES SHOULD BE SUPPLIED WITH "LOOSE RIVETS".
  5. WARNING: KEEP HANDS/CHILDREN AWAY WHILE OPERATING WINDOWS.

| ITEM | PART NO. | DESCRIPTION                   | QTY. |
|------|----------|-------------------------------|------|
| 13   | 2130     | SET-UP SWITCH                 |      |
| 12   | 2089     | ATTACHMENT RELEASE TOOL       |      |
| 11   | 2109     | ATTACHMENT EXTENSION PLATE    |      |
| 10   | 8-32     | PAN HEAD MACHINE SCREW X 1/4  |      |
| 9    | 2070A-2  | ACTUATOR GROUP CONTROLLER     |      |
| 8    | 10-24    | FLAT HEAD MACHINE SCREW X 3/8 |      |
| 7    | 8-32     | PAN HEAD MACHINE SCREW X 5/8  |      |
| 6    | 2070A-3  | ACTUATOR GROUP CONTROLLER     |      |
| 5    | 2125     | EXTENSION PLATE               |      |
| 4    | 10-24    | PAN HEAD MACHINE SCREW X 1/2  |      |
| 3    | 2112     | POWER SUPPLY (15A)            |      |
| 2    | 1831     | ROCKER SWITCH                 |      |
| 1    | 2092     | MONDO ACTUATOR                |      |

PROJECT: SAMPLE MONDO

CUSTOMER:  
ORDER NO.:  
ARCHITECT:  
WINDOW MFR. TORRANCE 2000 SERIES (STEEL WINDOW)

**CLEARLINE INCORPORATED**  
WINDOW CONTROL SYSTEMS  
P.O. BOX 1388  
NORTH WALESA, PENNSYLVANIA 19454

